

FIG. 1

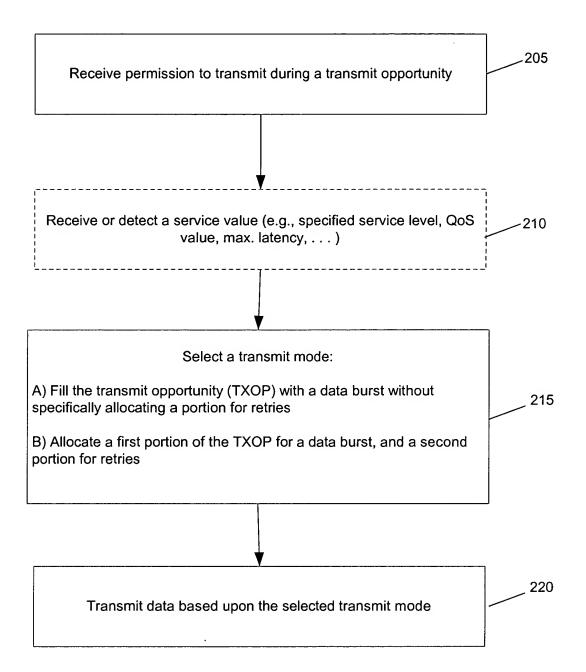


FIG. 2

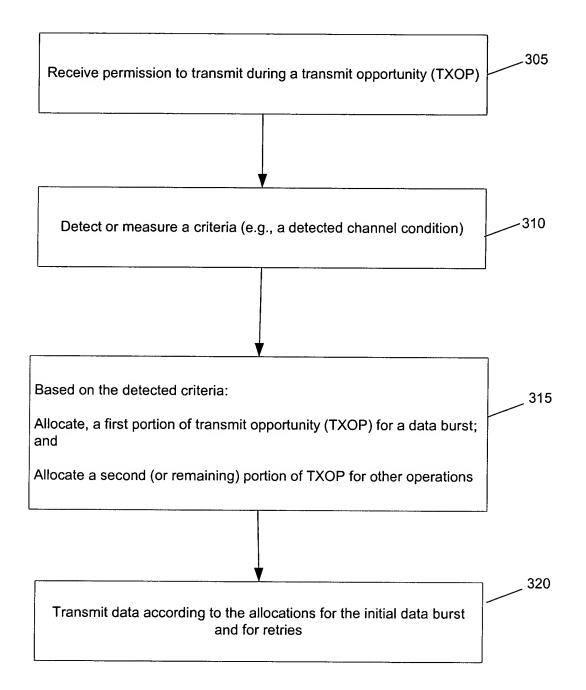


FIG. 3

Example detected channel conditions or other criteria: 405 Detect received signal strength (RSSI) Detect packet errors Detect or measure Bit Error Rate (BER) 415 measure packet failure rate 420

FIG. 4

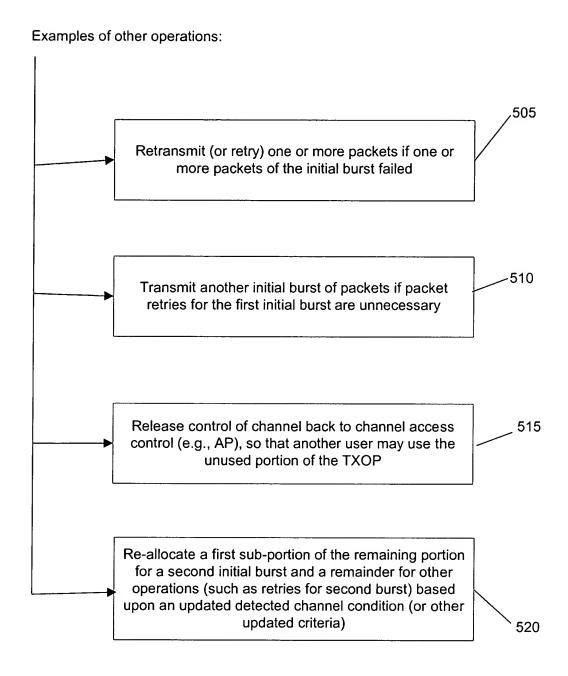


FIG. 5

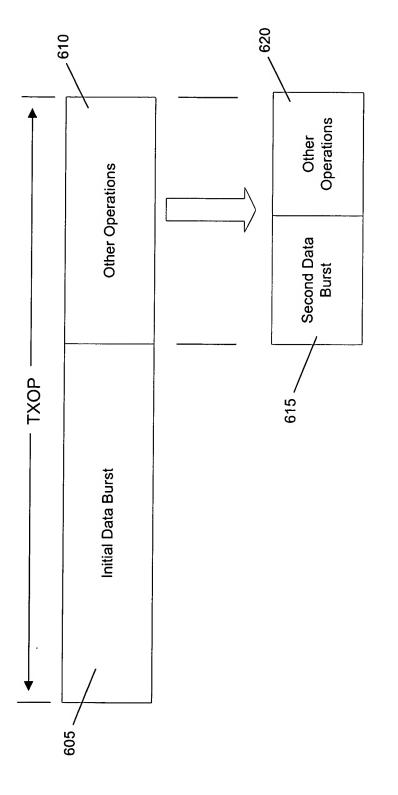
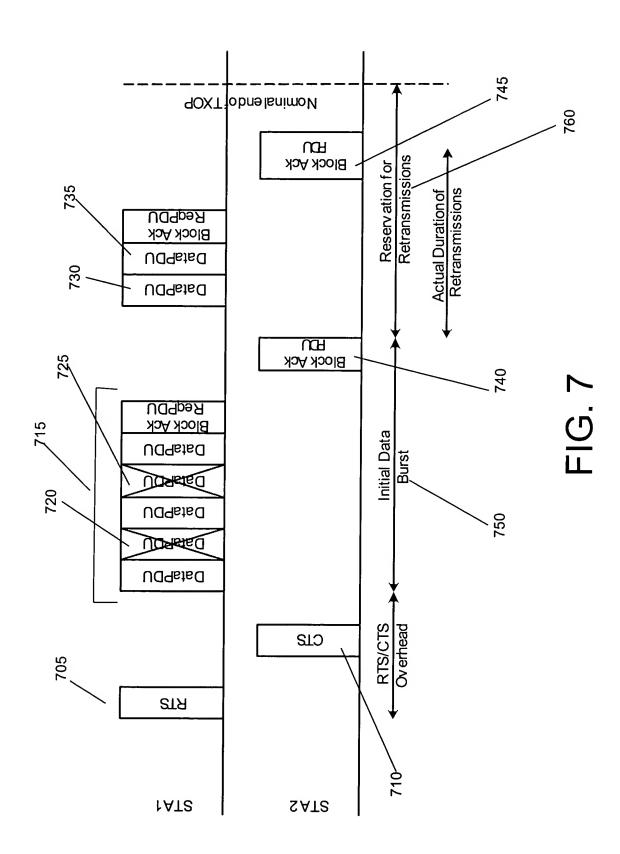
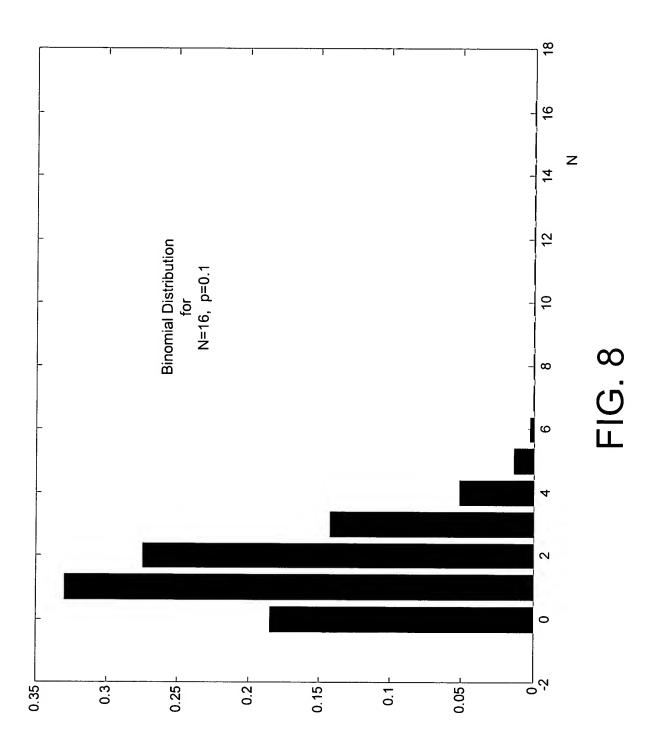
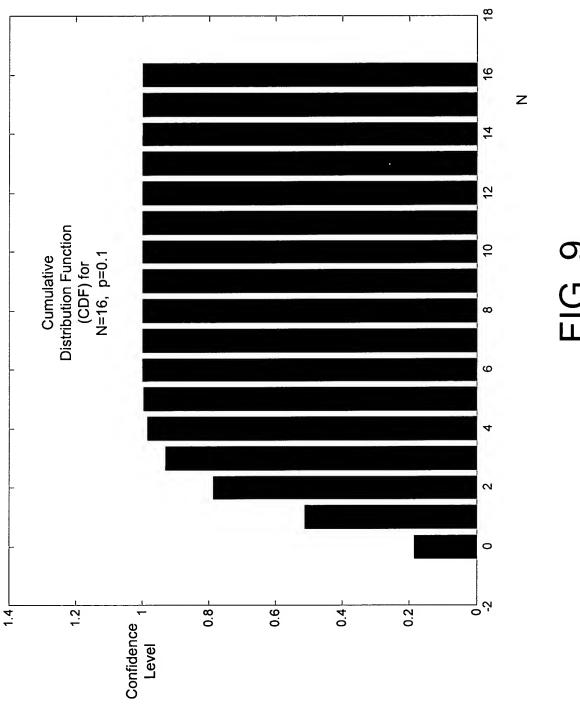


FIG. 6







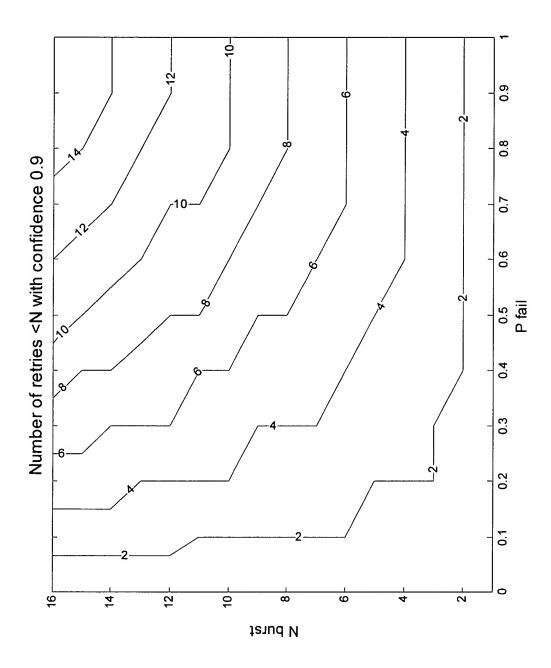


FIG. 10

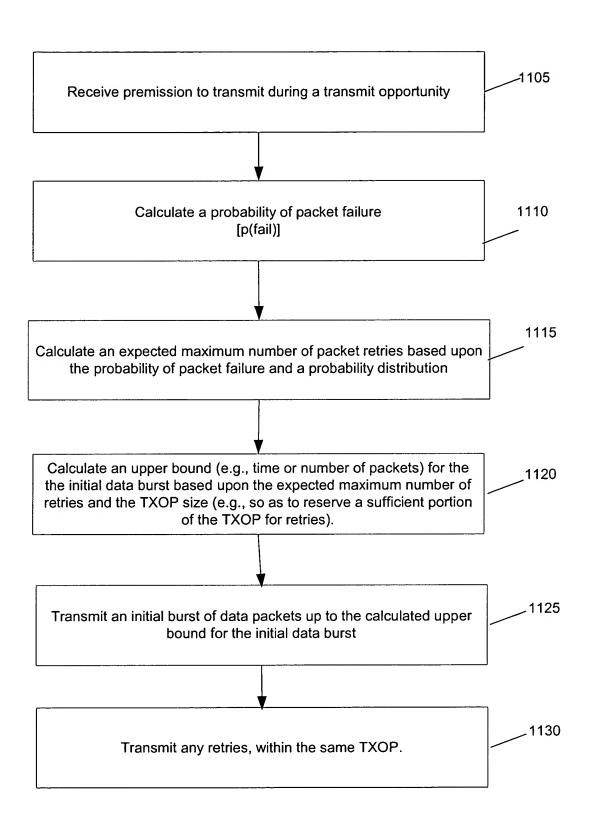


FIG. 11